


The new demolition and sorting grabs for excavators with 1t/2200lbs to 6t/13200lbs operating weight – THE universal tool for lighter demolition and sorting tasks of all kinds.

- ▷ New improved shell design!
- ▷ Including 360° rotator with low height.
- ▷ Perforated skin of shells lets dust and gravel through.
- ▷ Durable, extremely robust due to the use of cutting edge material 500HB steel.
- ▷ Integrated non-return valve guarantees secure retention of loads.
- ▷ High closing force achieved by horizontal cylinder  
 D02H: 18,3kN/4026lbf at 22MPa/3190psi;  
 D04H: 21,5kN/4730lbf & D06H: 21kN/4620lbf at 25MPa/3620psi.

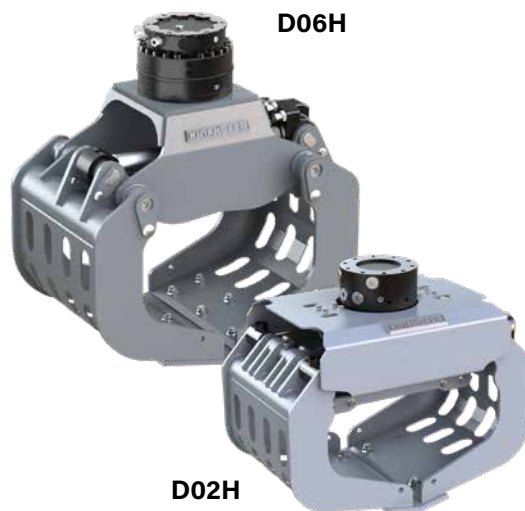

Demolition and Sorting Grab D02H / D04H / D06H								
Type	Width	Opening A	Height C max.	Volume	Capacity* form locking (kg/lbs)	Capacity* friction locking (kg/lbs)	Weight (kg/lbs)	Operating weight (t/lbs)
D02H-35	370 / 14.5	880 / 34.6	520 / 20.4	35 / 0.05	1250 / 2750	750 / 1650	121 / 266	1 - 2 / 2200-4400
D04H-40	420 / 16.5	1212 / 47.7	747 / 29.4	60 / 0.08	1500 / 3300	1000 / 2200	200 / 440	2 - 4 / 4400-8800
D06H-45	470 / 18.5	1345 / 52.9	817 / 31.1	90 / 0.12	2000 / 4400	1000 / 2000	227 / 499	4 - 6 / 8800-13200

\*) the load capacity indicated depends on the characteristics of the load (surface, largeness etc.)

Package consists of: demolition and sorting grab, **KINSHOFER** rotator, non-return valve, wear plates

**KINSHOFER Rotator**

Continuous rotation and two oil passages. Overload protection is ensured by pressure relief valves.

Type	Upper dimension (hole/Ø-hole pattern) (mm/in)	Torque (Nm/ft.lbs)	Bending moment max. (Nm/ft.lbs)
D02H: KM 04 F140/150	10 x M 12; Ø 150 / 5.9	850 / 626	3000 / 2212
D04H - D06H: KM 10 F214/180	6 x M 16; Ø 180 / 7	1000 / 737	12000 / 8850

**Accessories**

Type	Description
KM 691 2t	adapter plate for specific solutions – up to 2t / 4400 lbs
KM 690 2t	adapter for rigid mounting – up to 2t / 4400 lbs
KM 691 8t	adapter plate for specific solutions – up to 8t / 17600 lbs
KM 690 8t	adapter for rigid mounting – up to 8t / 17600 lbs
KSW01 rigid	bolt-on adapter for system L-Lock KMS01L/KHS01L for rigid mounting – up to 2t / 4400 lbs
KSW03 rigid	bolt-on adapter for system L-Lock KMS03L/KHS03L for rigid mounting – up to 6t / 13200 lbs
	adapters for quick change systems from other manufacturers or different sizes on request
KM 980-2 2t-8t c	solenoid valve for additional circuit, up to 26 MPa / 3770 psi, incl. parts and mounting
KM 685 05-D02-A02	4-Grip for D02/A02 (load capacity: 750 kg / 1650 lbs)
KM 685 05-D04-A04	4-Grip for D04/A04 (load capacity: 750 kg / 1650 lbs)
KM 685 05-D06/09-A06/09	4-Grip for D06/A06 and D09/A09 (load capacity: 750 kg / 1650 lbs)

**Requirements of carrier machine**

	D02H	D04H	D06H
Operating pressure (open/close):	max. 22 MPa (220 bar) max. 3190 psi	max. 25 MPa (250 bar) max. 3620 psi	max. 25 MPa (250 bar) max. 3620 psi
Recommended pump capacity (open/close):	10 - 40 l/min 2.5 - 10.5 GPM	25 - 75 l/min 6.5 - 20 GPM	25 - 75 l/min 6.5 - 20 GPM
Operating pressure (rotate):	max. 32 MPa (320 bar) max. 4640 psi	max. 32 MPa (320 bar) max. 4640 psi	max. 32 MPa (320 bar) max. 4640 psi
Recommended pump capacity (rotate):	10 - 40 l/min 2.5 - 10.5 GPM	15 - max. 50 l/min 4 - max. 13 GPM	15 - max. 50 l/min 4 - max. 13 GPM

**Technical drawing**



optional 4-Grip gripping device, here mounted to a D04H

