

Preliminary
US

MHL 380



328 hp



220 kW



150,000–158,300 lbs



max. 72'2"



FUCHS[®]

A TEREX BRAND

TECHNICAL DATA

Operating Weight without Attachments

MHL380 F	150,000–158,300 lbs
----------	---------------------

Diesel Engine

	U.S. Tier 4/ EU Stage V	U.S. Tier 3/ EU Stage IIIA*
Manufacturer and model	Deutz TCD 7.8 L6	Deutz TCD 7.8 L6
Design	6-cylinder in-line engine	6-cylinder in-line engine
Functionality	4-stroke diesel, common rail direct injection, turbocharged with intercooler, controlled exhaust gas recirculation, diesel particulate filter with continuous regeneration and SCR catalytic converter	4-stroke diesel, common rail direct injection, turbocharged with intercooler
Engine power	328 hp	328 hp
Rated speed	2,000 rpm	2,000 rpm
Displacement	476 cui	476 cui
Cooling system	Water and charge air cooling with temperature controlled fan speed	Water and charge air cooling with temperature controlled fan speed
Exhaust emission standard	U.S. Tier 4/ EU Stage V	U.S. Tier 3/ EU Stage IIIA*
Fuel tank	183 gal	183 gal
DEF / Urea tank	13 gal AdBlue	□

Electric Motor

Power	220 kW
Total connected load	270 kW
Motor start	Via soft start
Optional cable reel	Up to 164 ft (other lengths on request)

Electrical System

Alternator	28 V / 100 A
Operating voltage	24 V
Battery	2 × 12 V / 110 Ah / 750 A
Lighting system	2 × LED floodlights at the front of the machine, rear parking lights and indicator lights
Optional equipment	30 kW DC generator with insulation monitoring

Travel Drive

Hydrostatic drive through infinitely variable axial piston motor and directly mounted travel brake valves, all-wheel drive

Travel speed	0–5.6 mph
Gradeability	max. 25 %
Turning radius	34'9"

Swing Drive

Slewing ring	Internally geared double row slewing ring bearing, greasing via automatic lubrication system
Drive	2-stage planetary gear with integrated multi-disc brake
Uppercarriage swing speed	0–5 rpm infinitely variable
Slewing lock	Electrically activated

Undercarriage

Front axle	Planetary drive axle with integrated drum brake, rigidly mounted
Rear axle	Planetary drive axle with integrated drum brake, oscillating axle with selectable oscillating lock
Outriggers	4-point stabilizers
Tyres	Solid rubber 8-ply 14.00-24

Brakes

Service brake	Hydraulically operated braking system, acting on all four wheel pairs
Parking brake	Electrically operated disc brake, acting on both axles

Hydraulic System

Max. pump capacity	1 × 148 gpm and 1 × 40 gpm (for swing drive)
Max. operating pressure	4,641 / 5,221 psi
Hydraulic oil tank	140 gal
Filtration	Flow-optimized return filters, integrated in the oil tank. Filter fineness defined at a beta value $\beta(10) = 200$ guarantees 99.5% separation of dirt particles with 10 μm . Very good separation values are already achieved with particle sizes of 3 μm . Generously dimensioned for long operating times.
Tool control	Infinitely adjustable pressures for the grab functions open, close and rotation, as well as adjustable flow for the function grab rotation via the display
Cooling system	Separated high-performance cooler with temperature-dependent fan drive

Operator's Cab

Cab	<p>Infinitely variable hydraulic height-adjustable cabin with sliding door. Reinforced steel structure, soundproofed, heat-insulated panoramic windows for best all-round visibility, front window with roller blind, glass panel in the cabin roof with sliding blind. Heating and air conditioning, separate heat exchangers, fresh and recirculated air filters. Multifunction touch display, bottle holder, paper clip and multiple storage and mounting options. Digital radio (DAB+, USB, Bluetooth and hands-free), USB charging station 5V.</p> <p>Vertically adjustable cabin: viewing height of 20'1"</p> <p>Vertically and horizontally adjustable cabin (option): 7'3" forward, with max. viewing height of 21'3"</p>	
Air conditioning	Automatic air-conditioning. Infinitely variable heating with 8-speed fan, 10 adjustable air nozzles, 3 defroster nozzles.	
Operator's seat	Air-cushioned comfort seat with swinging armrests / joysticks, safety belt, lumbar support and headrest. Enables fatigue-free work due to universal adjustment options for the seat position, seat inclination and the arrangement of the seat cushion in relation to the armrests and joysticks.	
Monitoring	Ergonomically arranged, glare-free Multifunction display. Automatic monitoring and storage of deviating operating states (e.g. all hydraulic oil filters, hydraulic oil temperature – coolant and charge air temperature – diesel particulate filter loading, steering), visual and audible warning. Diagnostic option for the individual sensors via the multifunction display. Rear view and side view camera on the right with separate monitor.	
Noise level	U.S. Tier 4/ EU Stage V Sound power level (ambience) L_{WA} 102.7 dB(A) (metered) acc. to directive 2000/14/EC L_{WA} 104 dB(A) (guaranteed) acc. to directive 2000/14/EC Sound pressure level (inside the cabin) acc. to directive ISO 6396 L_{pA} 71 dB(A)	U.S. Tier 3/ EU Stage IIIA* Sound power level (ambience) L_{WA} 102.9 dB(A) (metered) acc. to directive 2000/14/EC L_{WA} 104 dB(A) (guaranteed) acc. to directive 2000/14/EC Sound pressure level (inside the cabin) acc. to directive ISO 6396 L_{pA} 70 dB(A)
Vibrations	Weighted r.m.s. value of acceleration of upper limbs: under 98 in/s^2 Weighted effective value of acceleration for the seat and feet: under 20 in/s^2	

Certified in accordance with CE regulations

* for low-regulated markets

EQUIPMENT

Diesel Engine	Standard	Option	Operator's Cab	Standard	Option
Water and charge air cooler	●		Windshield washer system	●	
Temperature-dependent fan drive	●		Washing device for roof window		●
Reversible fan		●	Roof window clear glass	●	
Direct electronic fuel injection / common rail	●		Air-cushioned operator seat with headrest, seatbelt and lumbar support	●	
DEF injection, passive regeneration	●		Seat heating		●
Advanced automatic idle incl. engine shut-off function	●		Joystick steering	●	
ECO and Power Mode	●		Steering column, height and tilt adjustable		●
Engine preheating		●	Air Conditioner	●	
Engine diagnostics interface	●		Auxiliary heating incl. timer		●
Undercarriage			Multi-function display	●	
All-wheel drive	●		Document clip	●	
Disk brakes	●		FOPS Guard		●
Rear axle oscillating lock	●		Cabin front and top guard		●
4-point stabilizers	●		Voltage converter 12 V		●
Stabilizer cylinder with integrated, double-sided shut-off valves	●		Digital radio (DAB+, USB, Bluetooth and hands-free system)	●	
Piston rod protection for support cylinder	●		12V socket / cigarette lighter	●	
Tool box	●		Fire extinguisher, dry powder with holder	●	
Special paint		●	Travel alarm with rotating beacon	●	
Solid rubber 8-ply 14.00-24	●		Other Equipment		
Uppercarriage			30 kW DC generator	●	
Separated high-performance cooling system	●		Close proximity range limiter for dipper stick	●	
Hydraulic oil cooler with temperature-dependent fan drive	●		Coolant and hydraulic oil level monitoring system	●	
Reversible fan		●	Overload and working area control		●
Automatic central lubrication system	●		Filtration system for attachments	●	
Rear view camera	●		Rupture valves for lifting cylinders	●	
Side view camera	●		Rupture valves for stick cylinders	●	
Travel alarm		●	Overload warning device	●	
Electric refuelling pump		●	Quick coupling on dipper stick	●	
Light protection		●	Active cyclone prefilter	●	
Special paint		●	Hydraulic oil preheating		●
Operator's Cab			Lubrication of the grab suspension by central lubrication system	●	
Vertically adjustable cabin		●	Light package 1 Basic LED (stick center)	●	
Vertically and horizontally adjustable cabin	●		Light package 3 Basic LED (cabin rear left)	●	
Single-pane safety glass (ESG)	●		LED head lights at the front of the machine	●	
Cabin tinted windows (side, rear)	●		Additional LED light packages		●
Sliding window in cab door	●		Float switch		●
Cabin with penetration resistant glass front and top (classification P5A)			Tool control	●	
Cabin with bullet-proof glass (classification P8B)			Fuchs Connect telematics system, incl. 5 years contract	●	


The equipment shown includes US specific options. Equipment may vary depending on sales region. Please contact your salesman in case of doubt

DIMENSIONS

Vertically adjustable cabin


Side view

all dimensions in ft & in

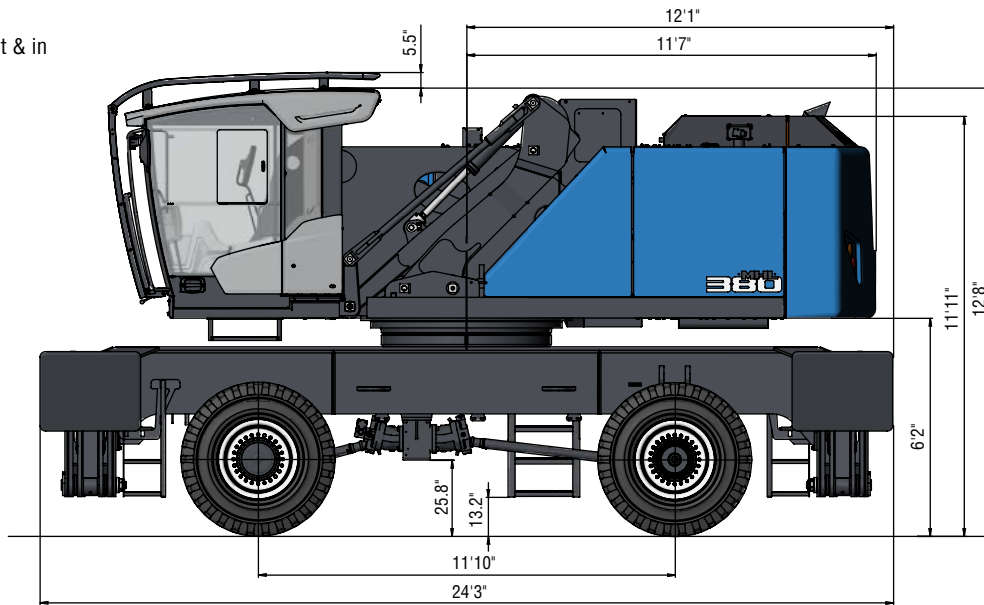

Side view

all dimensions in ft & in

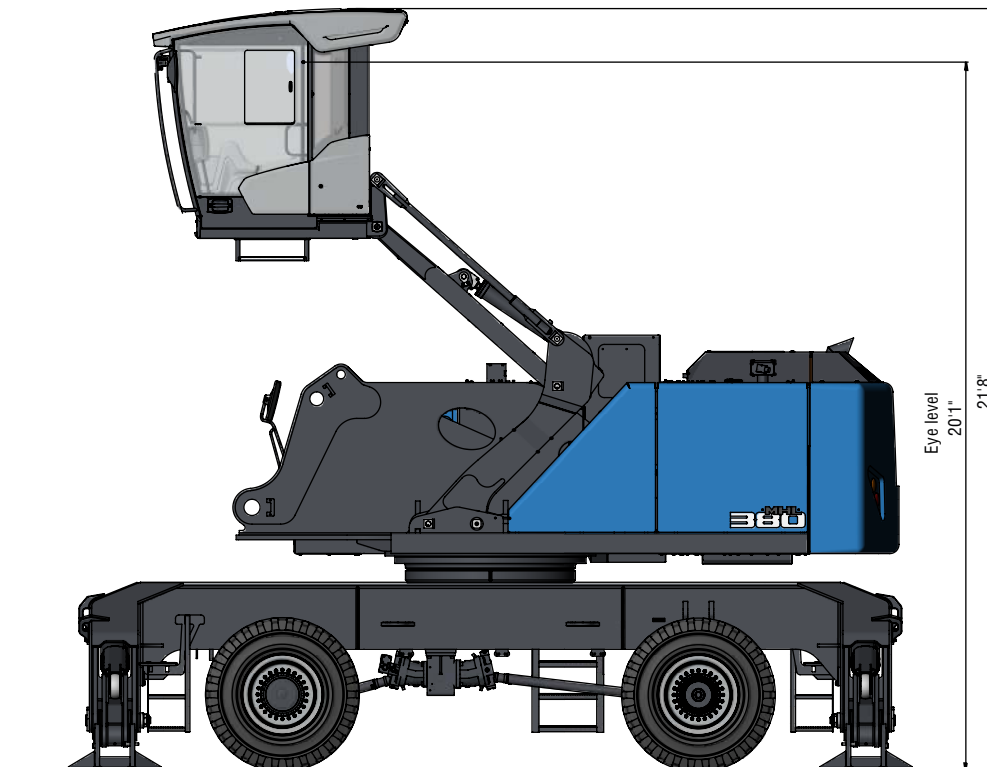


The equipment shown includes US specific options. Equipment may vary depending on sales region. Please contact your salesman in case of doubt

DIMENSIONS

Vertically and horizontally adjustable cabin*


Side view

all dimensions in ft & in

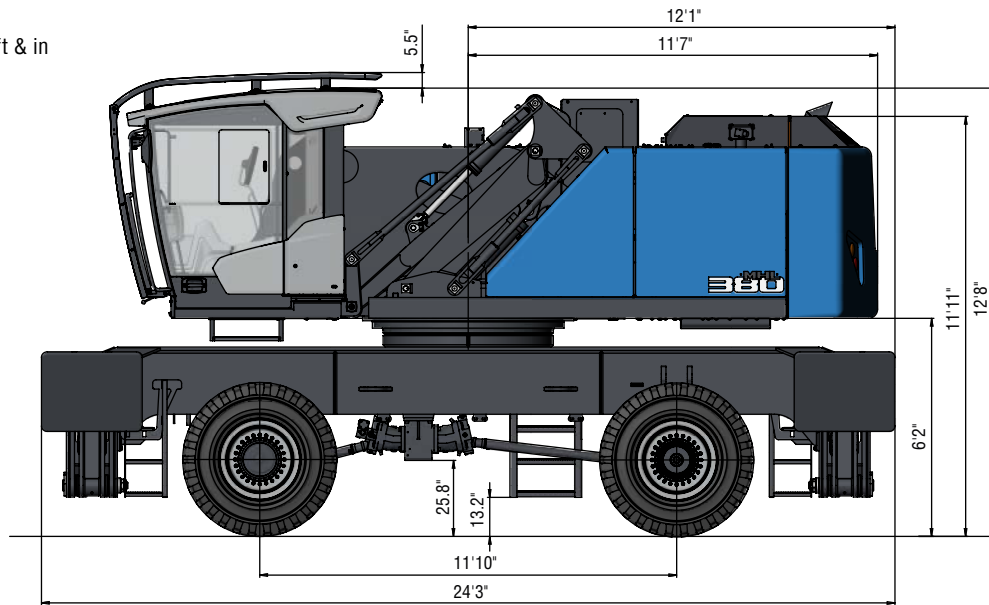

Side view

all dimensions in ft & in

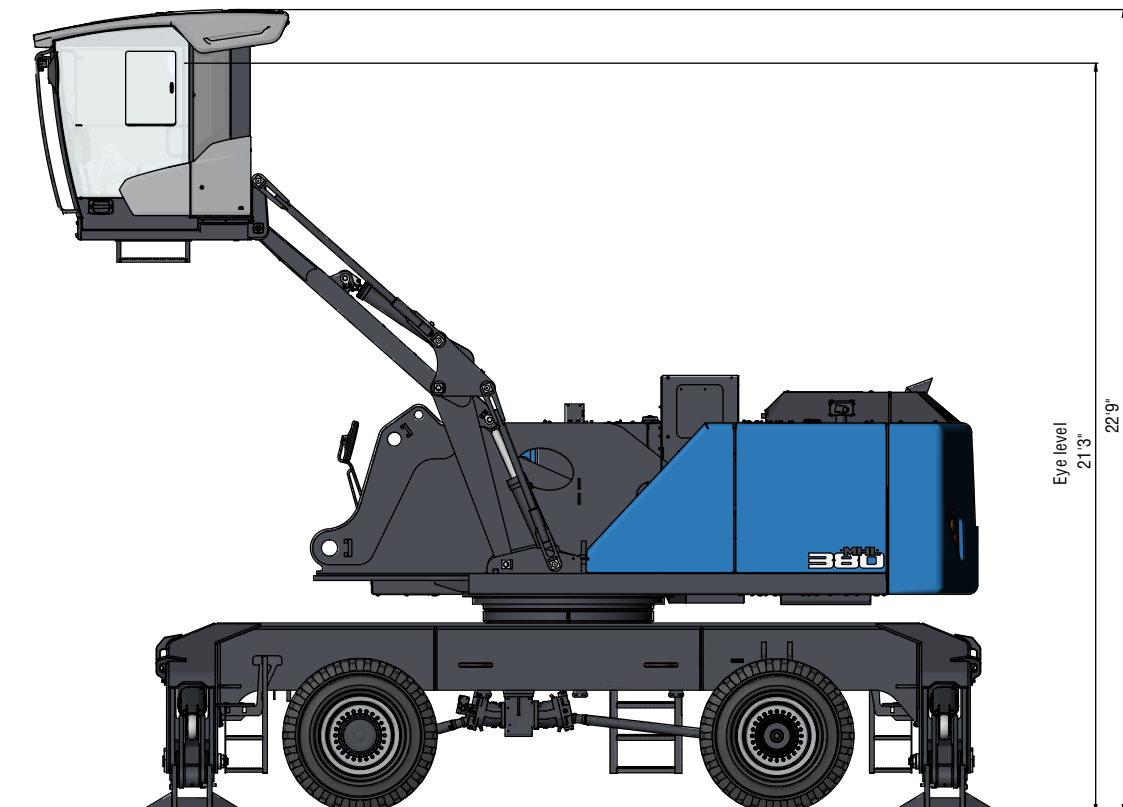


* Option

The equipment shown includes US specific options. Equipment may vary depending on sales region. Please contact your salesman in case of doubt

DIMENSIONS


Front view

all dimensions in ft & in

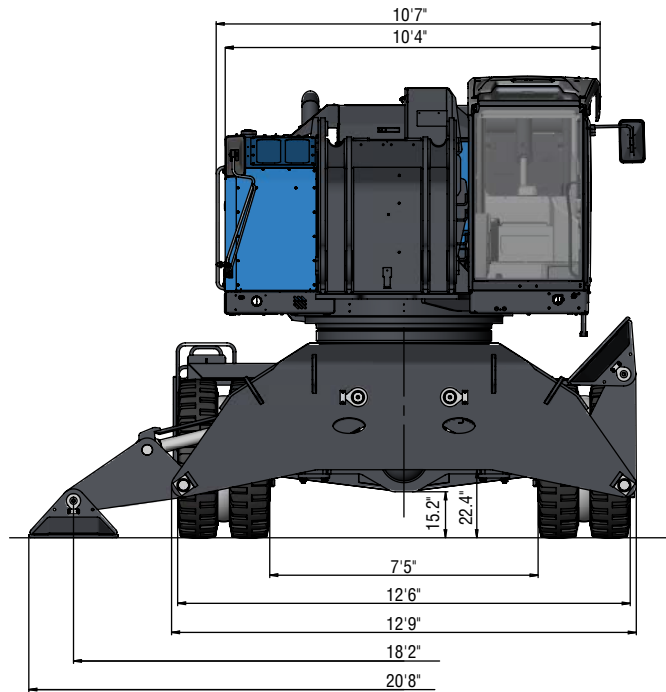

Front view with catwalk


all dimensions in ft & in

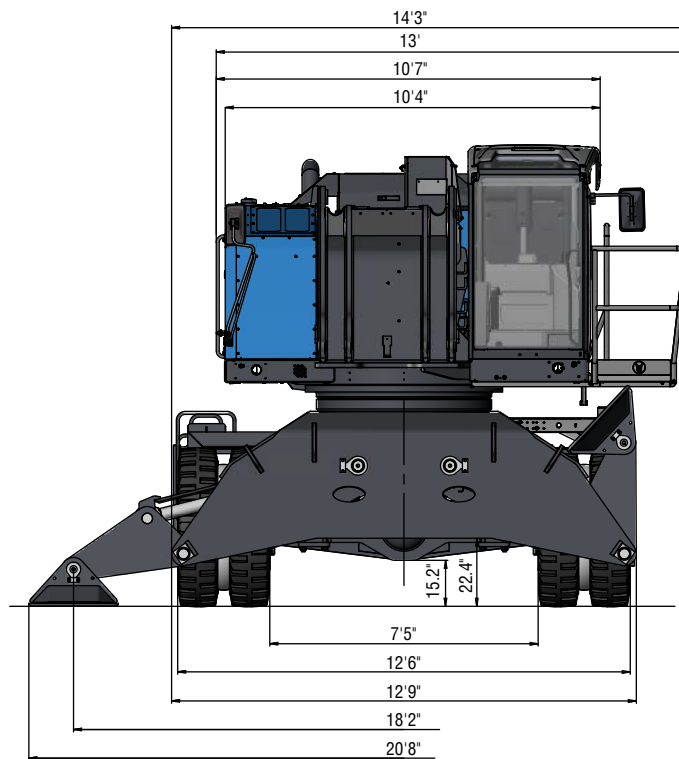

TRANSPORT DIMENSIONS

Loading equipment with dipper stick


all dimensions in ft & in

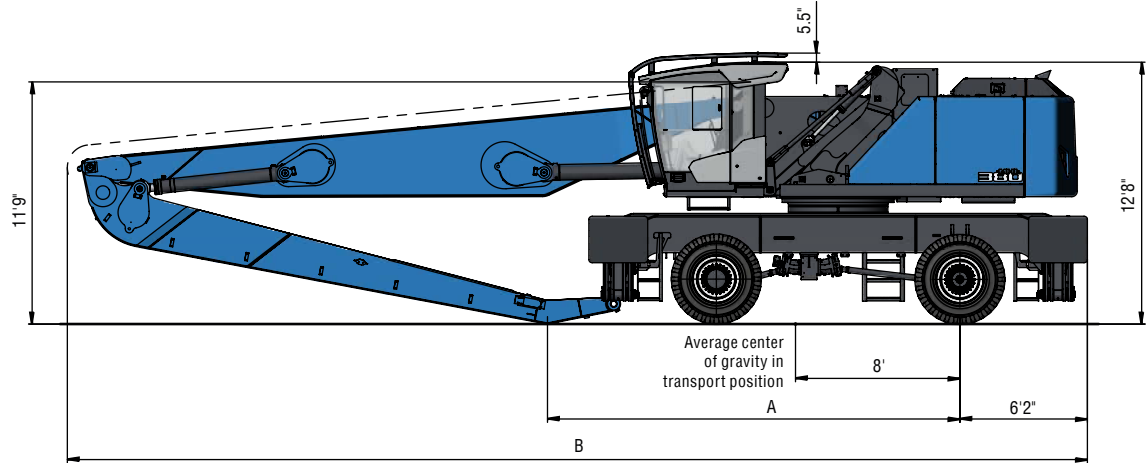

Reach	20'	65'7"	72'2"
A	20'	26'	18'9"
B	49'6"	55'8"	55'10"

Loading equipment with banana boom

all dimensions in ft & in

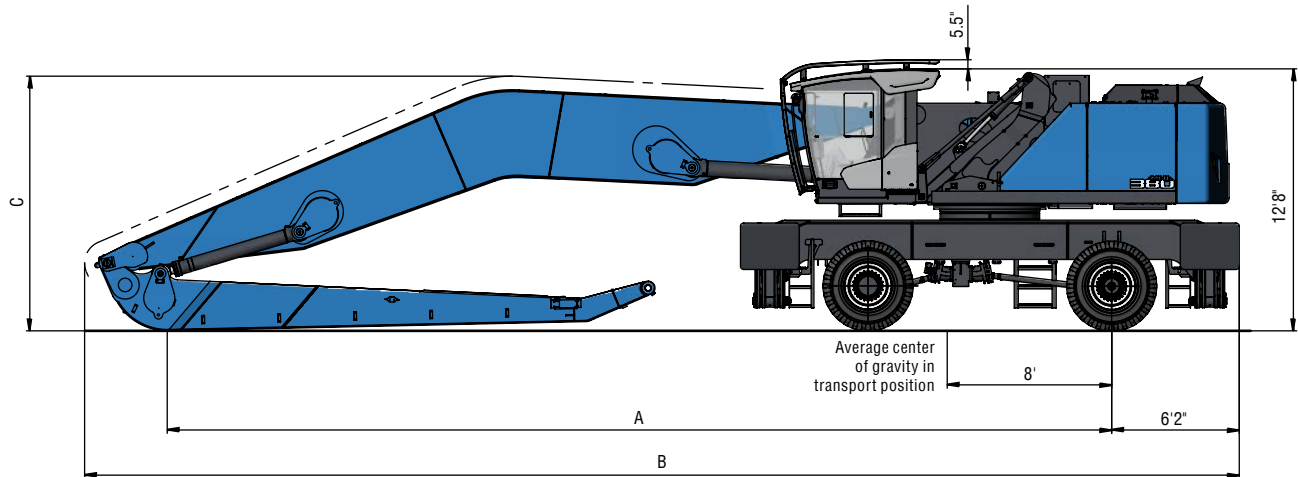


Reach	65'7"	72'2"
A	45'9"	31'11"
B	56'	56'
C	12'4"	12'5"







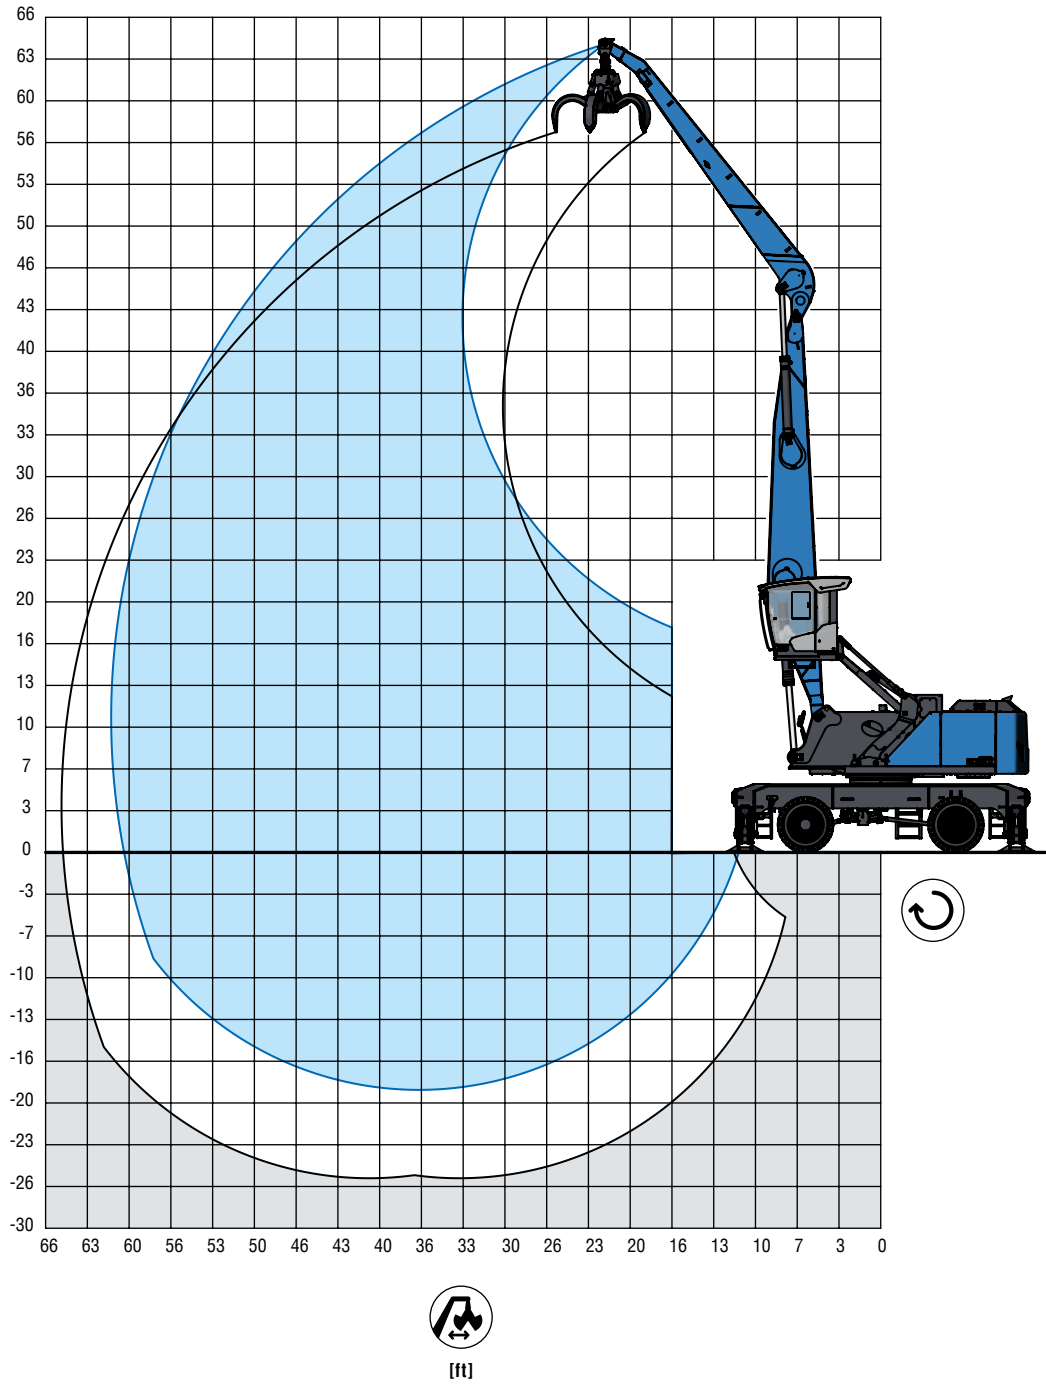












REACH

59' with dipper stick

Boom: 31'6" - Dipper stick: 26'3" - Cactus grab: 1 yd³



LIFTING CAPACITY

										
		20 ft	25 ft	30 ft	35 ft	40 ft	45 ft	50 ft	55 ft	60 ft
60 ft				19,000° (19,000°)						
55 ft					20,700° (20,700°)	14,700° (14,700°)				
50 ft					24,100° (24,100°)	20,400° (20,400°)	14,300° (14,300°)			
45 ft					24,900° (24,900°)	22,400° (22,400°)	19,400° (19,400°)	12,200° (12,200°)		
40 ft					26,800° (26,800°)	24,800° (24,800°)	21,600° (21,600°)	17,500° (17,500°)		
35 ft					27,900° (27,900°)	25,800° (25,800°)	23,900° (23,900°)	19,900° (19,900°)	13,600° (13,600°)	
30 ft				31,800° (31,800°)	28,900° (28,900°)	26,400° (26,400°)	24,300° (24,300°)	22,400° (22,500°)	17,400° (17,400°)	
25 ft				34,200° (34,200°)	30,300° (30,300°)	27,300° (27,300°)	24,900° (24,900°)	20,000° (22,800°)	18,700° (19,300°)	
20 ft		41,000° (41,000°)	43,800° (43,800°)	36,900° (36,900°)	32,000° (32,000°)	28,400° (28,400°)	25,500° (25,500°)	21,600° (23,200°)	18,400° (21,100)	12,900° (12,900°)
15 ft		44,100° (44,100)	44,100° (44,100)	39,800° (39,800°)	33,800° (33,800°)	29,500° (29,500°)	24,900° (26,200°)	21,100° (23,500°)	18,100° (21,200°)	14,700° (14,700°)
10 ft		44,100° (44,100)	44,100° (44,100)	42,300° (42,300°)	35,300° (35,300°)	28,800° (30,400°)	24,100° (26,700°)	20,600° (23,700°)	17,800° (21,100°)	15,600° (15,600°)
5 ft		23,300° (23,300°)	44,100° (44,100)	42,500° (43,900°)	33,900° (36,300°)	27,900° (30,900°)	23,500° (26,900°)	20,100° (23,600°)	17,500° (20,800°)	15,300° (15,300°)
0 ft		19,600° (19,600°)	40,400° (40,400°)	41,000° (44,100)	32,800° (36,500°)	27,100° (30,900°)	22,900° (26,700°)	19,800° (23,200°)	17,300° (20,100°)	13,500° (13,500°)
-5 ft		19,900° (19,900°)	34,200° (34,200°)	40,000° (43,100°)	32,000° (35,700°)	26,500° (30,200°)	22,500° (25,900°)	19,500° (22,300°)	17,100° (18,800°)	
-10 ft		21,400° (21,400°)	33,000° (33,000°)	39,500° (40,500°)	31,600° (33,800)	26,200° (28,600°)	22,300° (24,300°)	19,400° (20,600°)	16,600° (16,600°)	
-15 ft			33,900° (33,900°)	36,300° (36,300°)	30,600° (30,600°)	25,900° (25,900°)	21,100° (21,700°)			
										max. reach 60.4 ft
11 ft										10,600° (10,600°)

Recommended attachments upon request



Height



Reach



Center of rotation




4-point supported

The lift capacity values are stated in imperial pounds (lbs). In accordance with ISO 10567, the lift capacity values represents 75% of the static tipping loads or 87% of the hydraulic lifting force (marked °). On solid and level ground the values apply to a swing range of 360°. The (...) values apply in the longitudinal direction of the undercarriage. The weights of the attached load hoisting equipment (grab, load hock, etc.) must be deducted from the lift capacity values. The working load of the lifting devise must be observed. In accordance with the EN 474-5 for object handling application hose rupture valves on the boom and stick cylinders, an overload warning device and the lift capacity table in the cab are required. The machine has to be supported on a level ground for object handling application.







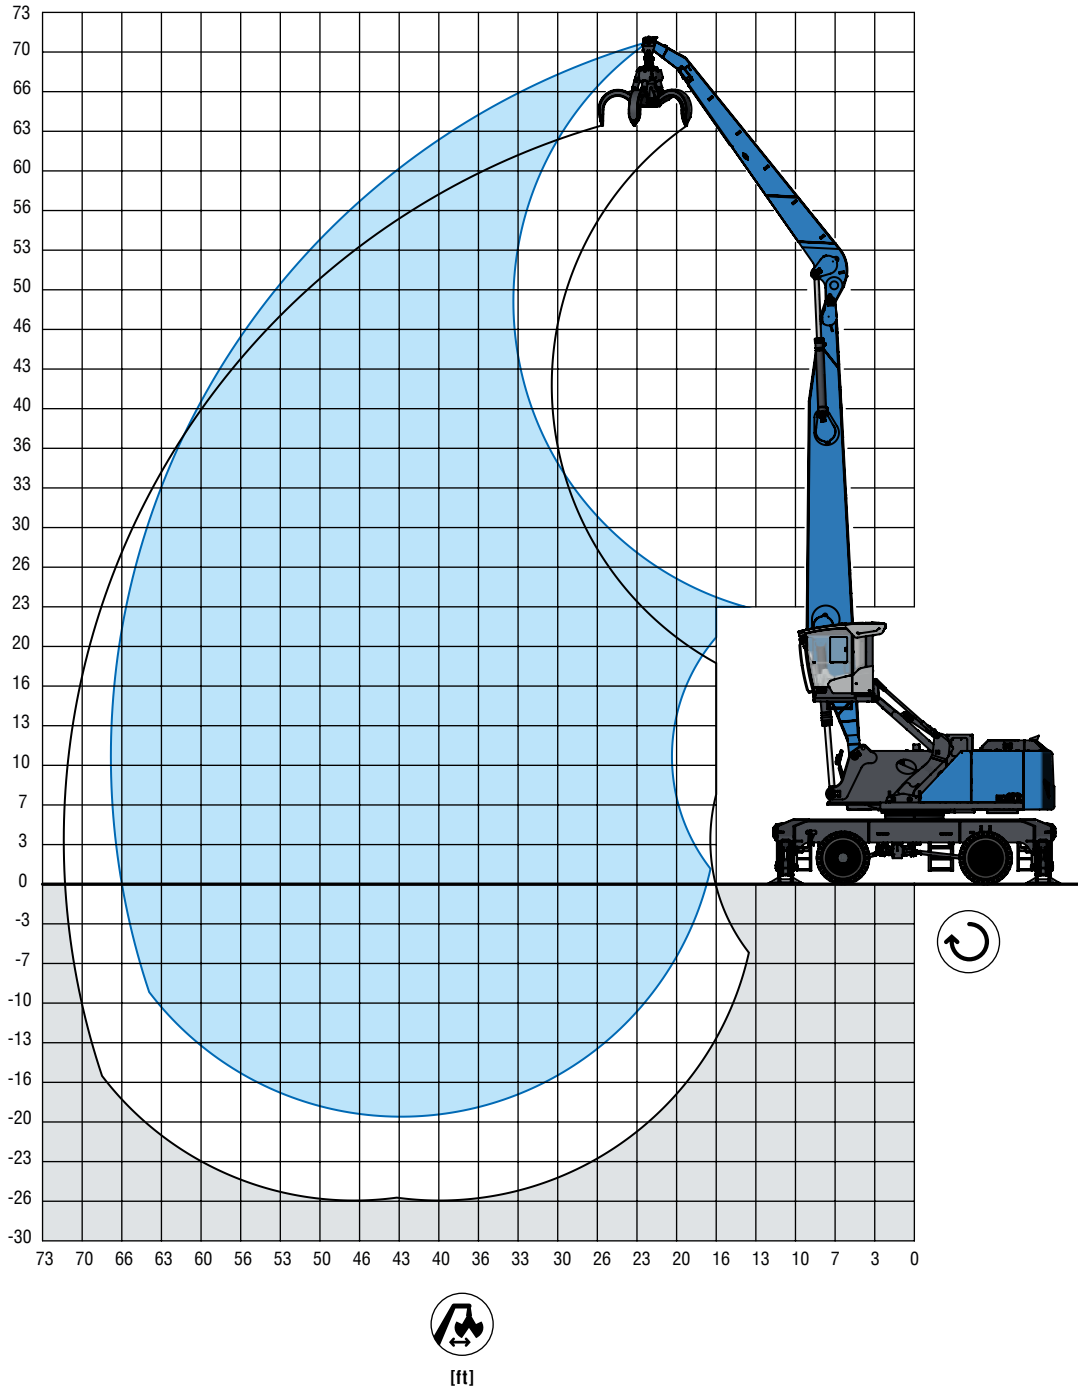















REACH

65'7" with dipper stick

Boom: 37'9" - Dipper stick: 26'3" - Cactus grab: 1 yd³



LIFTING CAPACITY

											
		20 ft	25 ft	30 ft	35 ft	40 ft	45 ft	50 ft	55 ft	60 ft	64 ft
69 ft			19,400° (19,400°)								
64 ft				20,900° (20,900°)	17,700° (17,700°)						
60 ft					21,200° (21,200°)	18,600° (18,600°)					
55 ft					23,700° (23,700°)	21,200° (21,200°)	18,500° (18,500°)				
50 ft					25,600° (25,600°)	23,800° (23,800°)	20,900° (20,900°)	17,700° (17,700°)			
45 ft					26,700° (26,700°)	24,100° (24,100°)	22,000° (22,000°)	20,200° (20,200°)	15,800° (15,800°)		
40 ft					27,100° (27,100°)	24,400° (24,400°)	22,200° (22,200°)	20,300° (20,300°)	18,600° (18,600°)	12,200° (12,200°)	
35 ft				31,800° (31,800°)	27,900° (27,900°)	24,900° (24,900°)	22,500° (22,500°)	20,500° (20,500°)	18,500° (18,800°)	15,500° (15,500°)	
30 ft				33,400° (33,400°)	28,900° (28,900°)	25,500° (25,500°)	22,900° (22,900°)	20,800° (20,800°)	18,200° (19,000°)	15,600° (17,400°)	
25 ft		44,100 (44,100)	43,000° (43,000°)	35,400° (35,400°)	30,200° (30,200°)	26,300° (26,300°)	23,400° (23,400°)	21,100° (21,100°)	17,800° (19,100°)	15,300° (17,400°)	13,400° (13,400°)
20 ft		44,100 (44,100)	44,100 (44,100)	37,500° (37,500°)	31,400° (31,400°)	27,100° (27,100°)	23,900° (23,900°)	20,300° (21,300°)	17,400° (19,200°)	15,000° (17,400°)	13,100° (14,900°)
15 ft		15,600° (15,600°)	44,100 (44,100)	39,300° (39,300°)	32,600° (32,600°)	27,700° (27,800°)	23,100° (24,300°)	19,700° (21,600°)	16,900° (19,300°)	14,700° (17,300°)	12,900° (15,400°)
10 ft			25,500° (25,500°)	40,000 (40,400°)	32,000 (33,300°)	26,400 (28,300°)	22,300 (24,600°)	19,100 (21,600°)	16,500 (19,200°)	14,400 (17,100°)	12,700 (15,100°)
5 ft		7,600° (7,600°)	18,200° (18,200°)	38,000 (40,400°)	30,600 (33,400°)	25,400 (28,300°)	21,500 (24,500°)	18,500 (21,500°)	16,100 (19,000°)	14,200 (16,800°)	12,600 (14,500°)
0 ft		9,300° (9,300°)	17,000° (17,000°)	32,100° (32,100°)	29,600 (32,800°)	24,600 (27,900°)	20,900 (24,100°)	18,000 (21,000°)	15,800 (18,500°)	13,900 (16,100°)	12,500 (13,600°)
-5 ft		11,600° (11,600°)	17,800° (17,800°)	29,300° (29,300°)	28,900 (31,400°)	24,000 (26,900°)	20,500 (23,200°)	17,700 (20,200°)	15,600 (17,600°)	13,800 (15,100°)	12,200° (12,200°)
-10 ft			19,300° (19,300°)	29,100° (29,100°)	28,600 (29,200°)	23,800 (25,200°)	20,200 (21,800°)	17,500 (18,900°)	15,500 (16,200°)	13,500° (13,500°)	
-15 ft				29,900° (29,900°)	26,200° (26,200°)	22,800° (22,800°)	19,700° (19,700°)	17,000° (17,000°)	14,300° (14,300°)		
max. reach 66.5 ft											
11 ft											10,700° (10,700°)

Recommended attachments upon request


-  Height
-  Reach
-  Center of rotation
-  4-point supported

The lift capacity values are stated in imperial pounds (lbs). In accordance with ISO 10567, the lift capacity values represents 75% of the static tipping loads or 87% of the hydraulic lifting force (marked °). On solid and level ground the values apply to a swing range of 360°. The (...) values apply in the longitudinal direction of the undercarriage. The weights of the attached load hoisting equipment (grab, load hock, etc.) must be deducted from the lift capacity values. The working load of the lifting device must be observed. In accordance with the EN 474-5 for object handling application hose rupture valves on the boom and stick cylinders, an overload warning device and the lift capacity table in the cab are required. The machine has to be supported on a level ground for object handling application.







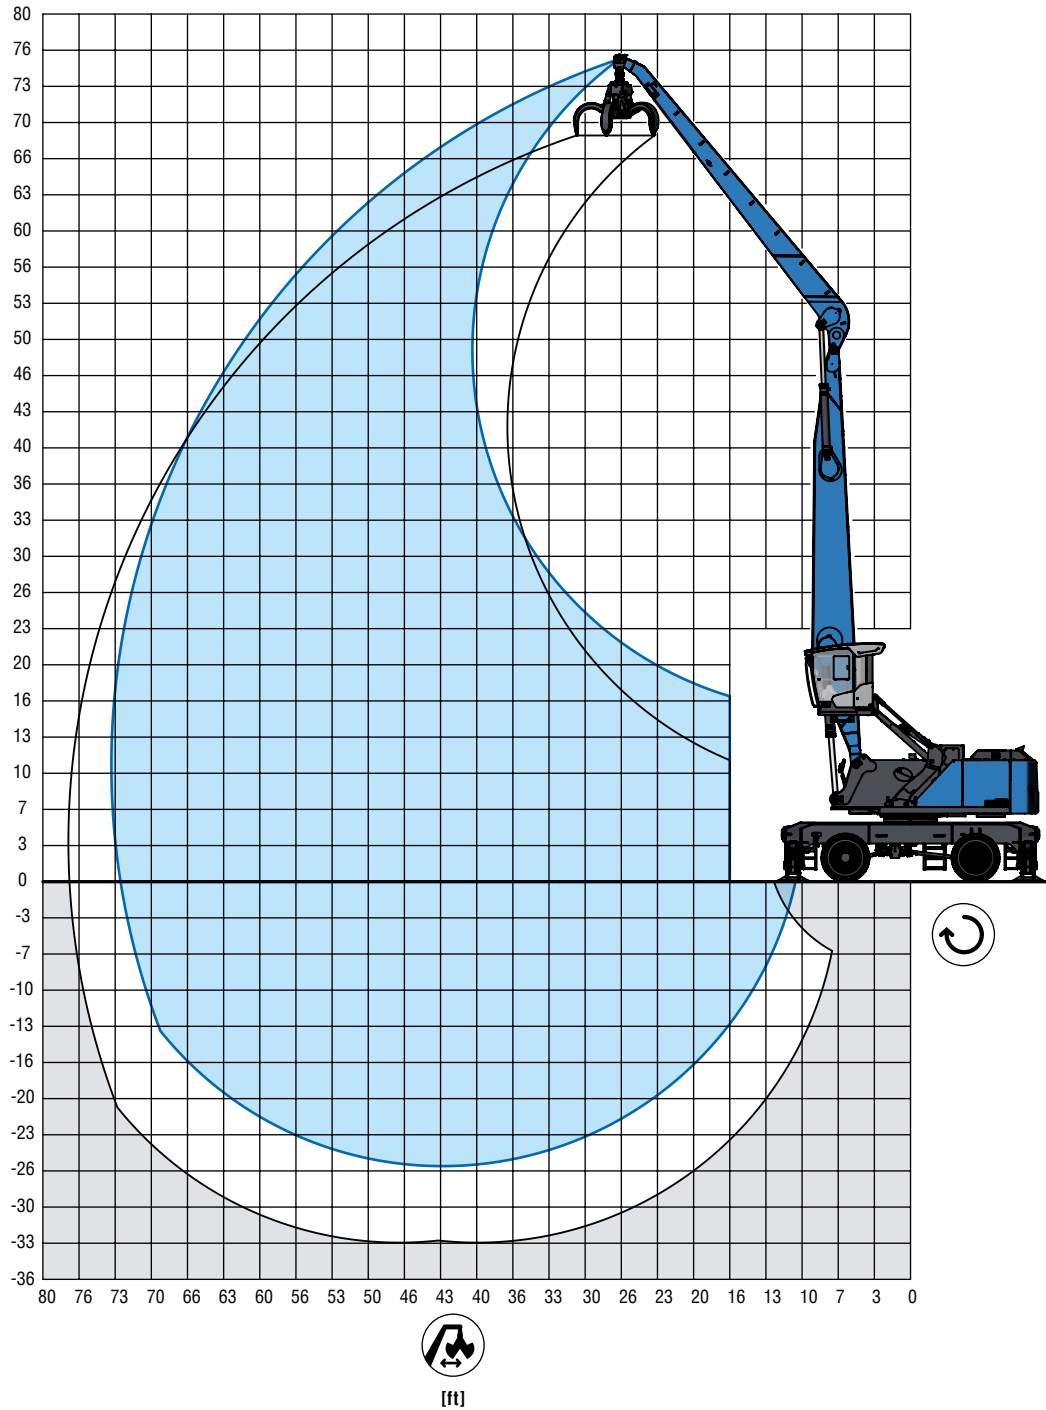


















REACH

72'2" with dipper stick

Boom: 37'9" - Dipper stick: 32'10" - Cactus grab: 1 yd³



LIFTING CAPACITY

													
			20 ft	25 ft	30 ft	35 ft	40 ft	45 ft	50 ft	55 ft	60 ft	64 ft	69 ft
74 ft			13,800° (13,800°)										
69 ft					15,100° (15,100°)	12,100° (12,100°)							
64 ft					15,400° (15,400°)	12,900° (12,900°)							
60 ft					17,500° (17,500°)	15,200° (15,200°)	12,800° (12,800°)						
55 ft					18,900° (18,900°)	17,200° (17,200°)	14,800° (14,800°)	12,100° (12,100°)					
50 ft						18,700° (18,700°)	16,800° (16,800°)	14,100° (14,100°)	10,600° (10,600°)				
45 ft						20,000° (20,000°)	18,500° (18,500°)	16,100° (16,100°)	12,800° (12,800°)				
40 ft						22,000° (22,000°)	20,200° (20,200°)	18,700° (18,700°)	17,400° (17,400°)	14,900° (14,900°)	11,200° (11,200°)		
35 ft						22,500° (22,500°)	20,600° (20,600°)	18,900° (18,900°)	17,500° (17,500°)	16,300° (16,300°)	13,500° (13,500°)		
30 ft					25,900° (25,900°)	23,200° (23,200°)	21,100° (21,100°)	19,300° (19,300°)	17,700° (17,700°)	16,200° (16,400°)	13,900° (14,600°)	9,600° (9,600°)	
25 ft				29,000° (29,000°)	27,200° (27,200°)	24,100° (24,100°)	21,700° (21,700°)	19,700° (19,700°)	18,000° (18,000°)	15,900° (16,500°)	13,700° (15,200°)	11,500° (11,500°)	
20 ft				35,600° (35,600°)	33,600° (33,600°)	28,700° (28,700°)	25,100° (25,100°)	22,300° (22,300°)	20,100° (20,100°)	18,200° (18,200°)	15,500° (16,600°)	13,400° (15,200°)	11,700° (12,200°)
15 ft			44,100 (44,100)	44,100 (44,100)	35,900° (35,900°)	30,200° (30,200°)	26,000° (26,000°)	22,900° (22,900°)	20,400° (20,500°)	17,500° (18,500°)	15,100° (16,700°)	13,100° (15,200°)	11,500° (13,200°)
10 ft			33,100° (33,100°)	44,100 (44,100)	37,900° (37,900°)	31,400° (31,400°)	26,900° (26,900°)	23,100° (23,400°)	19,600° (20,800°)	16,900° (18,600°)	14,600° (16,800°)	12,800° (15,100°)	11,300° (13,500°)
5 ft			15,000° (15,000°)	37,600° (37,600°)	39,200° (39,200°)	32,000° (32,300°)	26,300° (27,400°)	22,100° (23,800°)	18,900° (20,900°)	16,300° (18,600°)	14,200° (16,700°)	12,500° (14,900°)	11,100° (13,100°)
0 ft			12,500° (12,500°)	23,900° (23,900°)	37,800° (39,500°)	30,300° (32,500°)	25,100° (27,600°)	21,200° (23,800°)	18,200° (20,900°)	15,800° (18,500°)	13,900° (16,400°)	12,300° (14,500°)	11,000° (12,600°)
-5 ft			12,600° (12,600°)	20,500° (20,500°)	36,300° (37,100°)	29,100° (32,100°)	24,200° (27,200°)	20,500° (23,500°)	17,700° (20,500°)	15,400° (18,100°)	13,600° (15,900°)	12,100° (13,900°)	10,900° (11,700°)
-10 ft			13,500° (13,500°)	19,800° (19,800°)	31,800° (31,800°)	28,300° (31,000°)	23,500° (26,400°)	20,000° (22,800°)	17,300° (19,800°)	15,100° (17,300°)	13,400° (15,100°)	12,000° (12,900°)	10,200° (10,200°)
-15 ft			14,700° (14,700°)	20,200° (20,200°)	30,100° (30,100°)	27,900° (29,100°)	23,100° (24,900°)	19,700° (21,500°)	17,000° (18,700°)	14,900° (16,200°)	13,300° (13,900°)	11,400° (11,400°)	
-20 ft				21,100° (21,100°)	30,000° (30,000°)	26,400° (26,400°)	22,800° (22,800°)	19,500° (19,700°)	17,000° (17,000°)	14,500° (14,500°)	12,100° (12,100°)		
-25 ft						19,800° (19,800°)	17,100° (17,100°)						
max. reach 72.5 ft													
11 ft													7,800° (7,800°)

Recommended attachments upon request


-  Height
-  Reach
-  Center of rotation
-  4-point supported

The lift capacity values are stated in imperial pounds (lbs). In accordance with ISO 10567, the lift capacity values represents 75% of the static tipping loads or 87% of the hydraulic lifting force (marked °). On solid and level ground the values apply to a swing range of 360°. The (...) values apply in the longitudinal direction of the undercarriage. The weights of the attached load hoisting equipment (grab, load hock, etc.) must be deducted from the lift capacity values. The working load of the lifting device must be observed. In accordance with the EN 474-5 for object handling application hose rupture valves on the boom and stick cylinders, an overload warning device and the lift capacity table in the cab are required. The machine has to be supported on a level ground for object handling application.

REACH






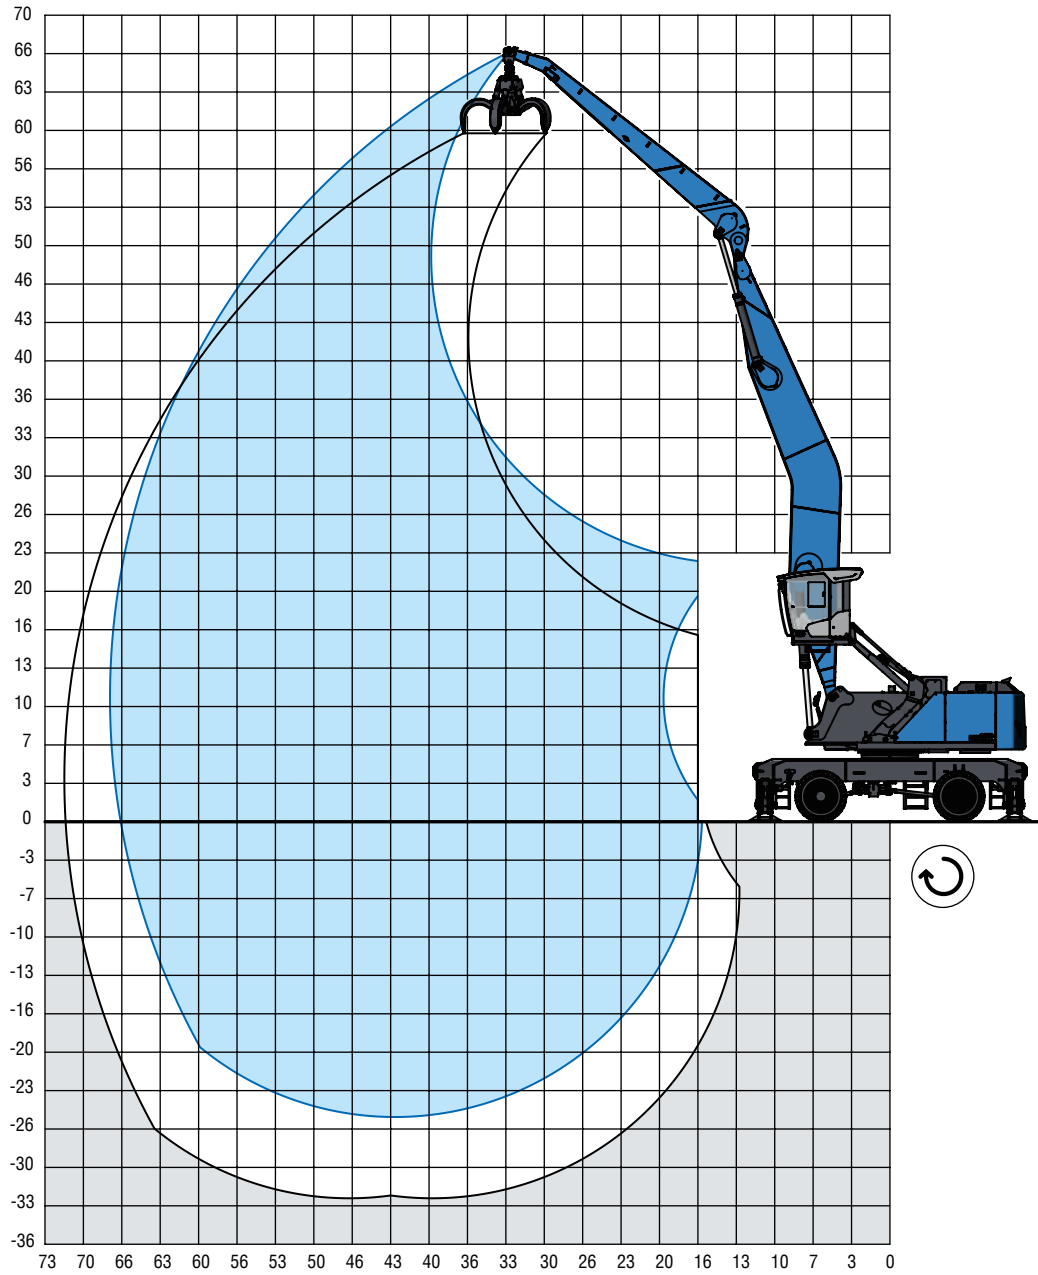

















65'7" with banana boom

Banana boom: 38'7" - Dipper stick 26'3" - Cactus grab: 1 yd³



[ft]

LIFTING CAPACITY

																			
			20 ft	25 ft	30 ft	35 ft	40 ft	45 ft	50 ft	55 ft	60 ft	64 ft							
64 ft						15,500° (15,500°)													
60 ft							17,400° (17,400°)												
55 ft								20,200° (20,200°)	17,500° (17,500°)										
50 ft								20,700° (20,700°)	19,100° (19,100°)	15,800° (15,800°)									
45 ft								20,800° (20,800°)	19,100° (19,100°)	17,800° (17,800°)	14,200° (14,200°)								
40 ft								21,100° (21,100°)	19,300° (19,300°)	17,900° (17,900°)	16,700° (16,700°)	11,800° (11,800°)							
35 ft								21,600° (21,600°)	19,700° (19,700°)	18,100° (18,100°)	16,800° (16,800°)	14,900° (14,900°)							
30 ft								25,200° (25,200°)	22,400° (22,400°)	20,200° (20,200°)	18,400° (18,400°)	17,000° (17,000°)	15,600° (15,700°)						
25 ft									37,800° (37,800°)	31,100° (31,100°)	26,500° (26,500°)	23,300° (23,300°)	20,800° (20,800°)	18,800° (18,800°)	17,200° (17,200°)	15,300° (15,300°)	12,300° (12,300°)		
20 ft									44,100 (44,100)	41,600° (41,600°)	33,300° (33,300°)	28,000° (28,000°)	24,200° (24,200°)	21,400° (21,400°)	19,200° (19,200°)	17,300° (17,400°)	14,900° (16,000°)	12,900° (14,500°)	
15 ft									14,500° (14,500°)	44,100 (44,100)	35,400° (35,400°)	29,300° (29,300°)	25,100° (25,100°)	22,000° (22,000°)	19,600° (19,600°)	16,800° (17,700°)	14,500° (16,100°)	12,600° (14,600°)	
10 ft									8,100° (8,100°)	24,100° (24,100°)	37,000° (37,000°)	30,400° (30,400°)	25,800° (25,800°)	22,000° (22,500°)	18,800° (19,900°)	16,200° (17,800°)	14,100° (16,100°)	12,400° (14,500°)	
5 ft									8,200° (8,200°)	18,100° (18,100°)	37,100° (37,800°)	30,000° (31,000°)	24,900° (26,300°)	21,100° (22,800°)	18,100° (20,100°)	15,700° (17,900°)	13,800° (16,000°)	12,100° (14,300°)	
0 ft									10,000° (10,000°)	17,100° (17,100°)	30,300° (30,300°)	28,700° (31,100°)	23,900° (26,400°)	20,300° (22,800°)	17,500° (20,100°)	15,300° (17,800°)	13,500° (15,800°)	11,900° (13,900°)	
-5 ft									12,100° (12,100)	17,800° (17,800°)	28,000° (28,000°)	27,900° (30,600°)	23,200° (26,100°)	19,800° (22,600°)	17,100° (19,700°)	15,000° (17,400°)	13,200° (15,300°)	11,800° (13,200°)	
-10 ft									14,200° (14,200°)	19,100° (19,100°)	27,700° (27,700°)	27,400° (29,500°)	22,800° (25,200°)	19,400° (21,900°)	16,800° (19,100°)	14,800° (16,700°)	13,100° (14,500°)		
-15 ft									20,700° (20,700°)	28,500° (28,500°)	27,300° (27,700°)	27,300° (27,700°)	22,600° (23,900°)	19,200° (20,700°)	16,700° (18,000°)	14,700° (15,600°)	13,100° (13,100°)		
-20 ft										28,900° (28,900°)	25,100° (25,100°)	21,800° (21,800°)	19,000° (19,000°)	16,400° (16,400°)	13,800° (13,800°)				
-25 ft																			
												max. reach 66.6 ft							
11 ft																			10,500° (10,500°)

Recommended attachments upon request


-  Height
-  Reach
-  Center of rotation
-  4-point supported

The lift capacity values are stated in imperial pounds (lbs). In accordance with ISO 10567, the lift capacity values represents 75% of the static tipping loads or 87% of the hydraulic lifting force (marked °). On solid and level ground the values apply to a swing range of 360°. The (...) values apply in the longitudinal direction of the undercarriage. The weights of the attached load hoisting equipment (grab, load hock, etc.) must be deducted from the lift capacity values. The working load of the lifting device must be observed. In accordance with the EN 474-5 for object handling application hose rupture valves on the boom and stick cylinders, an overload warning device and the lift capacity table in the cab are required. The machine has to be supported on a level ground for object handling application.







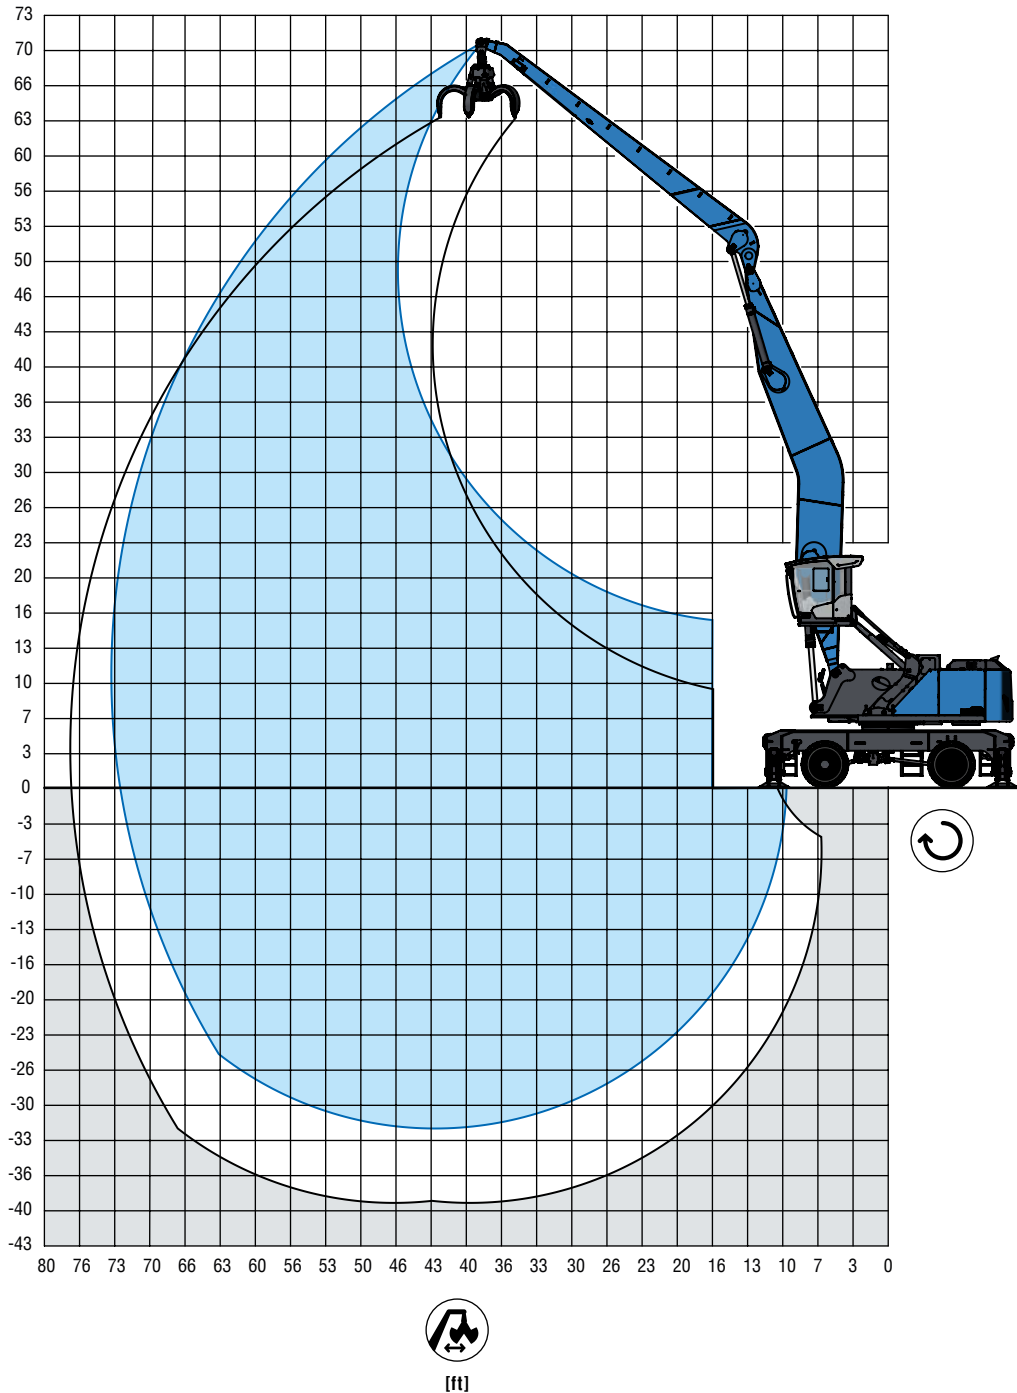


















REACH

72'2" with banana boom

Banana boom: 38'7" - Dipper stick 32'10" - Cactus grab: 1 yd³



LIFTING CAPACITY

		  										
		20 ft	25 ft	30 ft	35 ft	40 ft	45 ft	50 ft	55 ft	60 ft	64 ft	69 ft
69 ft		10,400° (10,400°)										
64 ft		11,200° (11,200°)										
60 ft		14,200° (14,200°) 11,900° (11,900°)										
55 ft		13,900° (13,900°) 11,200° (11,200°)										
50 ft		16,000° (16,000°) 13,200° (13,200°) 9,900° (9,900°)										
45 ft		16,000° (16,000°) 15,100° (15,100°) 12,000° (12,000°)										
40 ft		16,100° (16,100°) 15,100° (15,100°) 14,200° (14,200°) 10,500° (10,500°)										
35 ft		17,700° (17,700°) 16,400° (16,400°) 15,300° (15,300°) 14,300° (14,300°) 12,100° (12,100°)										
30 ft		18,300° (18,300°) 16,800° (16,800°) 15,500° (15,500°) 14,500° (14,500°) 13,600° (13,600°) 9,100° (9,100°)										
25 ft		21,000° (21,000°) 18,900° (18,900°) 17,200° (17,200°) 15,900° (15,900°) 14,700° (14,700°) 13,700° (13,700°) 10,300° (10,300°)										
20 ft		29,300° (29,300°) 25,100° (25,100°) 22,000° (22,000°) 19,600° (19,600°) 17,700° (17,700°) 16,200° (16,200°) 14,900° (14,900°) 13,300° (13,800°) 11,600° (11,600°)										
15 ft		44,100 (44,100)	39,400° (39,400°)	31,700° (31,700°)	26,600° (26,600°)	23,000° (23,000°)	20,300° (20,300°)	18,200° (18,200°)	16,500° (16,500°)	15,100° (15,100°)	13,000° (13,900°)	11,300° (12,700°)
10 ft		28,700° (28,700°)	43,000° (43,000°)	33,900° (33,900°)	28,100° (28,100°)	24,000° (24,000°)	21,000° (21,000°)	18,700° (18,700°)	16,800° (16,800°)	14,500° (15,300°)	12,600° (14,000°)	11,000° (12,800°)
5 ft		15,200° (15,200°)	34,100° (34,100°)	35,600° (35,600°)	29,200° (29,200°)	24,800° (24,800°)	21,600° (21,600°)	18,700° (19,100°)	16,100° (17,100°)	14,000° (15,400°)	12,200° (14,000°)	10,800° (12,700°)
0 ft		12,900° (12,900°)	23,200° (23,200°)	36,500° (36,500°)	29,800° (30,000°)	24,700° (25,300°)	20,900° (21,900°)	17,900° (19,300°)	15,500° (17,200°)	13,500° (15,400°)	11,900° (13,900°)	10,500° (12,400°)
-5 ft		12,900° (12,900°)	20,200° (20,200°)	34,500° (34,500°)	28,400° (30,200°)	23,600° (25,500°)	20,000° (22,100°)	17,200° (19,300°)	15,000° (17,200°)	13,100° (15,300°)	11,600° (13,700°)	10,400° (12,000°)
-10 ft		13,700° (13,700°)	19,400° (19,400°)	30,000° (30,000°)	27,400° (29,900°)	22,700° (25,300°)	19,300° (21,900°)	16,700° (19,100°)	14,600° (16,900°)	12,800° (15,000°)	11,400° (13,200°)	10,000° (10,000°)
-15 ft		14,700° (14,700°)	19,700° (19,700°)	28,400° (28,400°)	26,700° (28,900°)	22,200° (24,700°)	18,900° (21,300°)	16,300° (18,600°)	14,300° (16,300°)	12,700° (14,300°)	11,300° (12,400°)	
-20 ft		15,800° (15,800°)	20,300° (20,300°)	28,200° (28,200°)	26,500° (27,400°)	21,900° (23,500°)	18,600° (20,300°)	16,100° (17,700°)	14,200° (15,400°)	12,600° (13,300°)	11,100° (11,100°)	
-25 ft			21,200° (21,200°)	28,800° (28,800°)	25,200° (25,200°)	21,700° (21,700°)	18,600° (18,800°)	16,200° (16,200°)	14,000° (14,000°)	11,700° (11,700°)		
-30 ft					22,100° (22,100°)	19,100° (19,100°)	16,500° (16,500°)	14,100° (14,100°)				
max. reach 72.4 ft												
11 ft												7,600 (7,600°)

Recommended attachments upon request



Height



Reach



Center of rotation



4-point supported

The lift capacity values are stated in imperial pounds (lbs). In accordance with ISO 10567, the lift capacity values represents 75% of the static tipping loads or 87% of the hydraulic lifting force (marked °). On solid and level ground the values apply to a swing range of 360°. The (...) values apply in the longitudinal direction of the undercarriage. The weights of the attached load hoisting equipment (grab, load hook, etc.) must be deducted from the lift capacity values. The working load of the lifting device must be observed. In accordance with the EN 474-5 for object handling application hose rupture valves on the boom and stick cylinders, an overload warning device and the lift capacity table in the cab are required. The machine has to be supported on a level ground for object handling application.

MODULAR SYSTEM

Attachments




Cactus grab



Timber grapple



Magnet plate




Clamshell grab




Load hook


Work Equipment

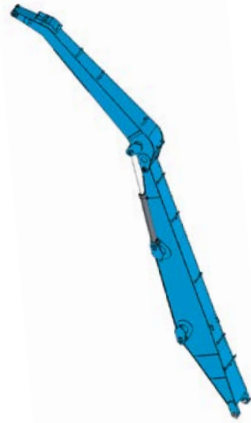


Straight

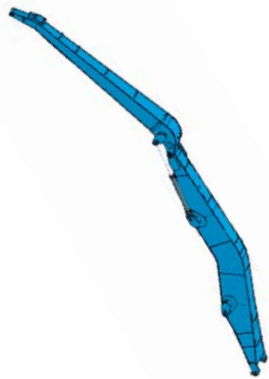

Banana boom

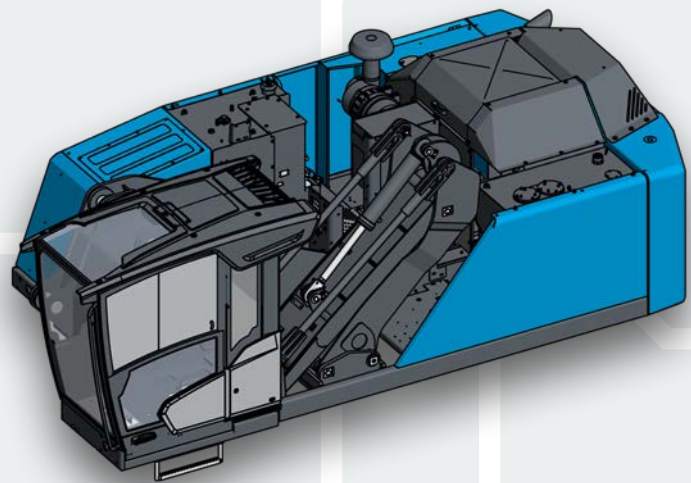


Undercarriage



Standard-undercarriage




2'7"




Standard-undercarriage



4'7"




XL-undercarriage




Crawler

Cab Systems

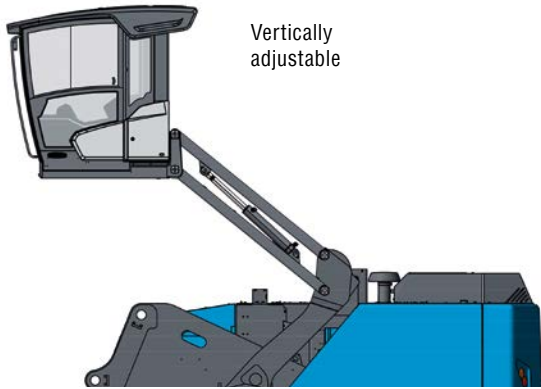


Vertically adjustable

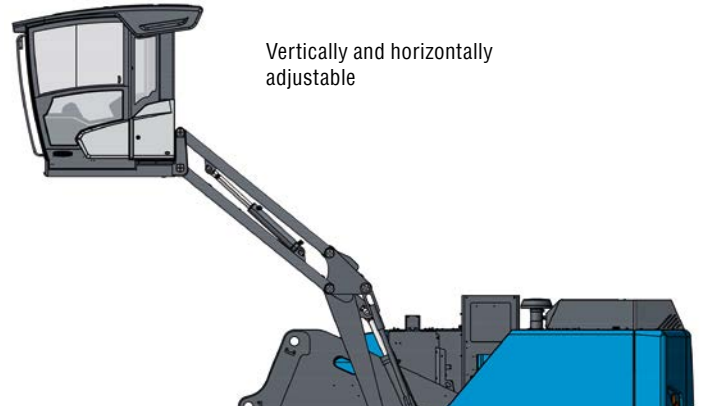


Vertically and horizontally adjustable

Engines



Diesel engine




Electric motor

Options



Cable reel



Cable drum



Crawler



Crawler: XL-undercarriage



AHL standard-undercarriage



AHL Pylon



www.terex-fuchs.com

June 2021. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. © Terex Corporation 2021 - Terex, the Terex Crown design, Fuchs and Works For You are trademarks of Terex Corporation or its subsidiaries.

Fuchs USA | 11001 Electron Drive | Louisville, KY 40299 | USA | Phone: +1 502 640 6001 | sales.fuchsus@terex.com

