

Mini-Jarraff SPECIFICATIONS

ELECTRICAL SYSTEM

- Power Requirements
- 12V - DC

BOOM, SAW HEAD, WINCH & PUSH BLADE

- Boom Construction - High-tensile, non-conductive fiberglass
- Saw Blade Diameter - 24 inches (610 mm)
- Saw Blade RPM - 2,990 RPM

OPERATIONAL CAPACITIES


- Maximum Cutting height - 55 feet (16.8 m)
- Rotation - 360° on turntable
- Rotation - 180° on boom
- Controls - wireless remote

PHYSICAL SPECIFICATIONS

- Traveling Length - 29 feet (8.84 m)

	4-Wheel Drive Model (Standard Tire Size - 31 x 15.5R15)
Undercarriage	Articulation
Weight	9,960 lbs (4,520 Kg) Full Wet Weight
Ground Pressure	15.7 PSI (1.08 Bar) w/15.50-15 Tires
Width (Outside Dimension)	Transport - 6 feet 2 inches (1.88 m) Operating - 10 feet 4 inches (3.15 m)
Carrier Length	15 feet 4 inches (4.67 m) - Variable as Wheels Extend
Height	10 feet (3.05 m)

Mini-Jarraff SPECIFICATIONS

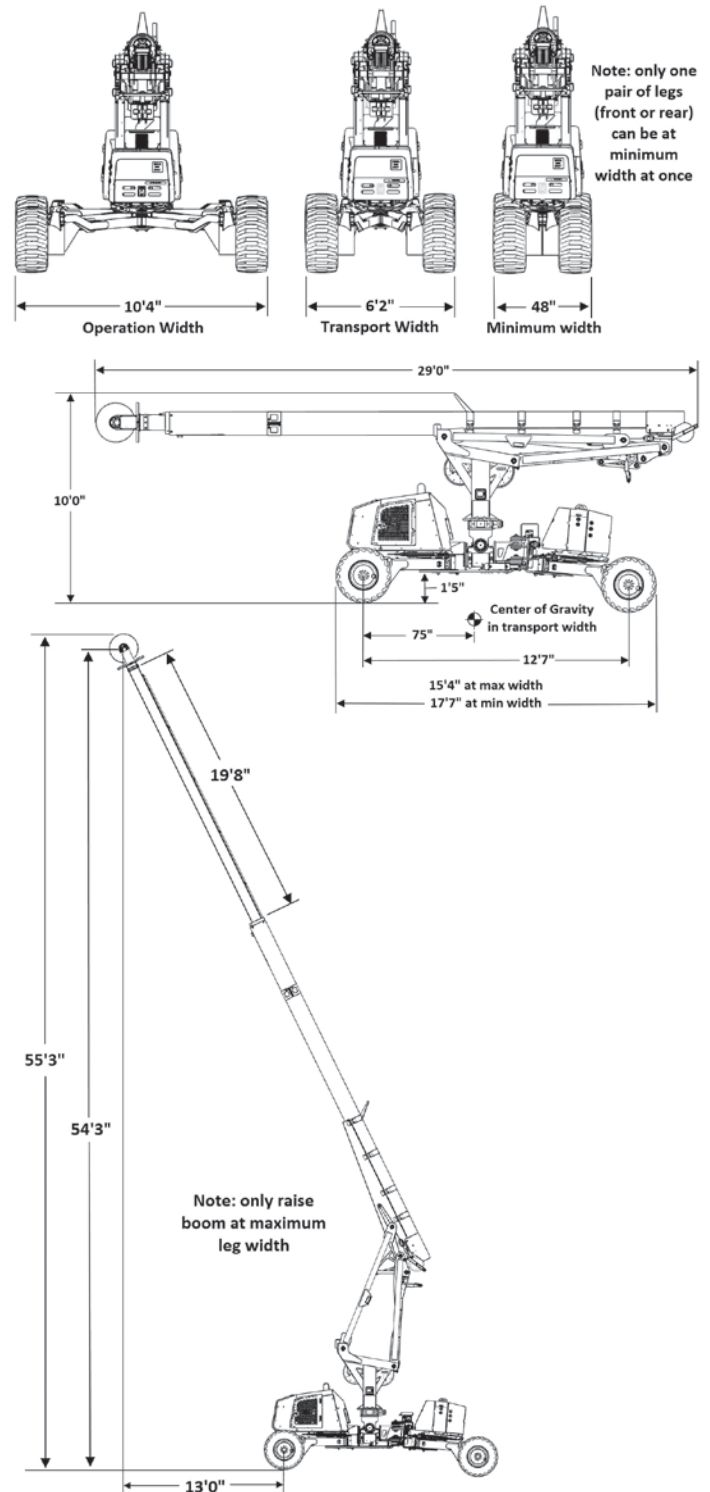

JARRAFF.COM | 800-767-7112

Jarraff Industries LLC
1731 Gault Street, St. Peter, MN 56082